

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>7</sup> : <b>F41H</b>	<b>A2</b>	(11) International Publication Number: <b>WO 00/62007</b> (43) International Publication Date: 19 October 2000 (19.10.00)
--	-----------	--

(21) International Application Number: PCT/US00/08990  
(22) International Filing Date: 31 March 2000 (31.03.00)

(30) Priority Data:  
60/127,245 31 March 1999 (31.03.99) US

(71) Applicant (for all designated States except US): **TEXTRON SYSTEMS CORPORATION** [US/US]; 201 Lowell Street, Wilmington, MA 01887 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **COMPERE, Paul** [US/US]; 315 Medford Street, Malden, MA 02148 (US). **DARDEN, William, S.** [US/US]; 190 Ballville Road, Bolton, MA 01740 (US). **TREASURE, Monte, A.** [US/US]; 3 Overlook Drive, Pelham, NH 03076 (US). **SINGLER, Robert, E.** [US/US]; 53 Selwyn Road, Belmont, MA 02478 (US). **DIBONA, Gary, S.** [US/US]; 13 Douglas Drive, Amherst, NH 03031 (US).

(74) Agents: **PIERCE, N., Scott et al.; Hamilton, Brook, Smith & Reynolds, P.C.,** Two Militia Drive, Lexington, MA 02421 (US).

(81) Designated States: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


Published

Without international search report and to be republished upon receipt of that report.

(54) Title: **COMPOSITE ARMOR AND FABRICATION METHOD**

(57) Abstract

A composite element in an armored vehicle or armored garment includes a reaction-bonded ceramic matrix with ceramic fiber embedded therein. Preferably, the reaction-bonded ceramic matrix includes nitride-bonded silicon carbide, and the ceramic fiber includes silicon carbide. The matrix can additionally include nitride-bonded boron carbide. In a method of this invention, plies of non-woven, monofilament silicon carbide fiber are formed, and a slip including silicon carbide powder and silicon powder is cast around the plies to form a matrix around the plies. The silicon/silicon carbide matrix is then reaction-bonded to form a composite element of this invention.

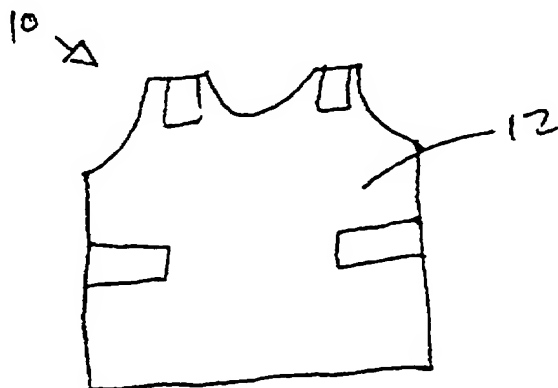

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Larvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

-1-

## COMPOSITE ARMOR AND FABRICATION METHOD

## RELATED APPLICATION

This application claims the benefit of U.S. Provisional Application No. 60/127,245, filed March 31, 1999, the entire teachings of which are incorporated  
5 herein by reference.

## BACKGROUND OF THE INVENTION

Conventional armor typically includes a monolithic element, such as aluminum oxide ( $Al_2O_3$ ), silicon carbide (SiC) or boron carbide ( $B_4C$ ), attached to a backing, such as KEVLAR para-aramid cloth (available from E.I. DuPont de  
10 Nemours, Wilmington, Delaware, USA), SPECTRA polyethylene fabric (available from Honeywell, Morristown, New Jersey, USA), fiberglass cloth, rubber, or aluminum honeycomb. Armor of this sort routinely is used for shielding vehicles, such as tanks, aircraft, space stations, etc., as well as for shielding individuals, including military personnel and police officers, when incorporated, for example, in  
15 bullet-proof vests.

In recent years, the idea of forming armor of a composite material, rather than of a monolithic material, has been explored. A principal advantage of using a composite material is that it can provide improved fracture toughness relative to monolithic materials. These efforts, however, have focused on hot-pressed  
20 composite materials. While hot-pressing is useful for forming a dense composite material, the process is expensive and is limited to forming simple shapes. Further, hot pressing typically requires the use of sintering aids, and the high temperatures required for hot pressing (typically greater than  $1600^{\circ}C$ ) tend to degrade continuous fibers placed in the matrix.

## 25 SUMMARY OF THE INVENTION

A composite element of this invention is a component of an armor shell on a vehicle substructure or in an armored garment that can be worn to protect the wearer

from projectiles. The composite element of this invention includes a reaction-bonded ceramic matrix with ceramic fibers embedded therein.

In a method of this invention, plies of non-woven, monofilament silicon carbide fibers are formed, and a slip including silicon carbide (SiC) powder and  
5 silicon powder is cast around the plies to form a matrix around the plies. The matrix is then reaction-bonded to form a composite element of this invention.

Alternatively, the silicon carbide powder can be replaced, at least in part, with boron carbide (B<sub>4</sub>C) powder. The composite element is then attached either to a vehicle substructure or to a garment to be worn by an individual to shield the vehicle/wearer  
10 from ballistics (*e.g.*, bullets, explosives and/or missiles, depending on the application).

The composite elements and methods of this invention offer a number of advantages in terms of cost, performance, and ease of forming. For example, reaction-bonded composite elements of this invention can be formed at less expense  
15 than hot-pressed composites, with the reaction-bonding process allowing for incorporation of continuous fiber reinforcement. Also, composite elements of this invention have the capability to withstand multiple ballistic impacts notwithstanding their high porosity relative to typical hot-pressed composites. In addition, reaction-bonded composite elements of this invention can easily be formed into a wide  
20 variety of shapes of complex geometry, offering far greater design freedom relative to hot-pressed composites and offering a better match to optimal shapes needed for vehicle and body armor. Further, the reaction-bonding process of this invention bonds the matrix particles at much lower temperatures and pressures than is required for hot-pressing or sintering.

## 25 BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and other objects, features and advantages of the invention will be apparent from the following more particular description of preferred embodiments of the invention, as illustrated in the accompanying drawings. The drawings are not necessarily to scale, emphasis instead being placed upon  
30 illustrating the principles of the invention.

FIG. 1 illustrates an embodiment of an armored garment of this invention.

FIG. 2 illustrates an embodiment of an armored vehicle of this invention.

## DETAILED DESCRIPTION OF THE INVENTION

This invention is generally directed to armored vehicles and armored  
5 garments that comprise at least one composite element including ceramic fiber  
embedded in a reaction-bonded ceramic matrix. The term, "armor," is used herein to  
refer to a protective sheathing designed to prevent ballistic penetration. Additionally  
the terms, "fiber" and "fibers," are used interchangeably herein to refer to either a  
single extended filament or a plurality of filaments. The terms, "armored garment"  
10 and "body armor" also are used interchangeably herein.

In preferred embodiments of a composite armor of this invention, the  
reaction-bonded composite element of this invention is bonded or otherwise secured  
either to a fabric, such as a KEVLAR or fiberglass cloth, for forming semi-rigid  
body armor or to a substrate, such as a slab of rubber or an aluminum honeycomb, to  
15 form a composite armor. In the case of body armor 10, as shown in FIG. 1, the  
composite element 12 is a component of a garment designed to shield the wearer of  
the vest from injury due to bullets and other ballistics. In the latter case, the  
composite armor 22 is then attached to a vehicle substructure 24, such as that of an  
aircraft, spacecraft, or earth-based vehicle (such as the tank 20 in FIG. 2), to shield  
20 the vehicle from bullets, missiles, and explosives.

Armored garments, or "body armor," of this invention can be of either a rigid  
or semi-rigid design. In rigid body armor, the composite element typically is a  
large, molded panel designed to cover certain portions of the human body. Semi-  
rigid armored garments typically include a plurality of composite elements in the  
25 form of relatively-small articulated plates reinforced with a woven ballistic material,  
*e.g.*, KEVLAR cloth.

The use of armored garments for protecting vital organs is particularly  
important. Accordingly, a preferred embodiment of this invention is a garment, such  
as a vest, that protects the torso. Armored garments of this invention offer  
30 protection not only against ballistics but also against clubs and other rigid objects

that may cause injury during a battery or accident (e.g., vehicular). Armor of this invention also protects against blunt trauma--which can pose a serious danger to a wearer of non-rigid armor, for example, due to deformation of the armor when impacted by a projectile such as a bullet--because the composite element of this invention is highly resistant to deformation.

Under the classification system for body armor established under Standard 0101.03 by the National Institute of Justice (NIJ), armor "types" ranging from Type I to Type IV have been established to indicate the level of threat that a given armor product is capable of defending against. Whereas fabric-based armor systems, such as those that use KEVLAR cloth, are typically used against threats from smaller-caliber ballistics, the "hard" armor of this invention is preferred for use as a Type III, III-A, or IV body armor against higher-level threats. Type III-A armor is designed to protect against .44 Magnum and submachine gun 9 mm bullets. Type III armor is designed to protect against high-powered rifle bullets. Finally, Type IV armor is designed to protect against "armor piercing" bullets.

In preferred embodiments, the ceramic fiber is formed of silicon carbide; the fibers form about 4% to about 10%, by volume, of a composite that includes SiC fiber and a bonded SiC or B<sub>4</sub>C matrix. Where the composite element is to be used as vehicle armor or Type IV body armor system, a fiber content of about 6% to about 10%, by volume, is preferred. For Type III or Type III-A body armor (for protection against non-armor piercing munitions), a composite that can withstand multiple hits can be formed with a fiber content of about 4% to about 6% by volume.

Preferably, the fibers are SCS-6<sup>TM</sup> fibers, available from Textron Systems Corp. (Wilmington, Massachusetts, U.S.A.). The SCS-6<sup>TM</sup> fibers are manufactured from a carbon monofilament and have a circular cross-section with a diameter of 140 microns (μm). Alternatively, or in addition, 79-μm fibers (commercially available as SCS-9A<sup>TM</sup> from Textron Systems Corp.) may also be employed. In the SCS-6<sup>TM</sup> fiber, the carbon monofilament is approximately 35 μm in diameter. The fiber is coated with an approximately 17-μm-thick carbon-rich silicon carbide buffer via chemical vapor deposition of a feed of a silane blend, hydrogen, argon and propane. The buffer layer, in turn, is coated with an approximately 32-μm-thick

stoichiometric silicon-carbide bulk layer, also applied by chemical vapor deposition. Finally, an approximately 3- $\mu$ m-thick carbon-rich silicon carbide deposit is applied, also by chemical vapor deposition, as a surface coating on the silicon carbide bulk layer.

5           The reaction-bonded ceramic matrix in which the fibers are embedded preferably comprises nitride-bonded silicon carbide and/or nitride-bonded boron carbide. In the "reaction-bonding" technique, which is derived from methods for fabricating monolithic ceramics, at least one component of the matrix is chemically reacted with a liquid or gas. In this example, a blend of silicon carbide powders and  
10 silicon metal is consolidated by nitridation of the silicon metal, resulting in a  $\text{Si}_3\text{N}_4$ -bonded SiC matrix having continuous SiC filament reinforcements. The nitride-bonding process generally produces a matrix with higher porosity (typically between about 10% and about 20%) than that of hot-pressed or sintered materials. In an embodiment where the SiC-based matrix comprises approximately 20% silicon  
15 nitride by weight, the resultant porosity can be between about 14% and about 18%. Additionally, the matrix can also include cubic boron nitride. The matrix concentration of cubic boron nitride is preferably about 20% in a region that is selected, depending upon the characteristics of the ballistics that it is designed to shield against, to provide the greatest barrier to ballistic penetration. In one  
20 embodiment, this region extends 2 mm from the surface that is subject to impact. In other embodiments, this region is in an interior portion of the armor or extending from the inner surface, which is remote from impact so that the ballistic can be subject to initial shearing before reaching the cubic-boron-nitride-hardened region.

          In a method of this invention, plies of non-woven, monofilament silicon  
25 carbide fiber are formed, and a slip comprising silicon carbide powder and silicon powder is cast around the plies to form a matrix. Next, the matrix is reaction-bonded to form a composite element. The composite element can then be attached to either a vehicle substructure to form an armored vehicle or to a garment to form an armored garment.

30           In one embodiment, the composite is formed starting with a slip of the following composition, with the approximate percentage of each component, by

weight, indicated in parentheses: silicon carbide powder or a mixture of silicon carbide and boron carbide powders (70% to 75%), silicon powder (8% to 12%), red iron oxide and sodium silicate (1% to 3%) and distilled water (10% to 20%). The specific composition of a preferred slip, with SiC and silicon broken down by

5 particle-size distribution, is as follows:

	0.1 - 1.0 $\mu\text{m}$ $\beta$ -SiC particles	13.96%
	1 - 2 $\mu\text{m}$ $\beta$ -SiC particles	7.49%
	2 - 3 $\mu\text{m}$ $\beta$ -SiC particles	5.20%
	3 - 4 $\mu\text{m}$ $\beta$ -SiC particles	2.54%
10	4 - 10 $\mu\text{m}$ $\beta$ -SiC particles	2.54%
	80 - 120 $\mu\text{m}$ $\beta$ -SiC particles	42.30%
	5 - 10 $\mu\text{m}$ silicon particles	8.46%
	10 - 14 $\mu\text{m}$ silicon particles	2.12%
	red iron oxide	1.44%
15	sodium silicate	0.08%
	water (distilled)	13.87%

The above-described slip is agitated and mixed by continuously rolling it in a sealed container on a motorized drum roller. Inside the sealed container are dense rubber balls used to assist in the mixing process.

20 A plaster mold is used to form the final shape of the composite element, which, in this case, is in the form of a plate. The height of the borders around the mold govern the thickness of the plate. Initially, a thin layer of the slip is poured into the mold, then separate plies of SCS-6 fiber are placed over the slip. The SCS-6 fibers are placed in alternating 0° and 90° orientations and can be equally spaced or

25 spaced closer toward one side of the plate. Each ply of fiber is laid between alternating applications of the slip, with an application of slip above and below the beginning and ending plies of fiber. When the fiber additions are completed a final application of slip is poured to top off the mold.



The green body is removed from the plaster mold and dried in an oven set between 100° and 120°C. The dried plates are loaded into a furnace and placed under a vacuum. The temperature in the furnace is increased at a rate of 5°C/min. At 500°C, the vacuum system is isolated and the furnace is filled with nitrogen. The  
5 nitrogen pressure is maintained at 800 torr throughout the remainder of the nitriding cycle to convert the pure silicon metal to silicon nitride, thereby "nitride bonding" the silicon carbide matrix. At 950°C, the ramp rate is lowered to 2.5 °C/min until it reaches 1150°C, where the temperature is held for six hours. The temperature is then ramped to 1250°C at a rate of 0.42°C/min. The temperature is then held at  
10 1250°C for six hours and then ramped to 1350°C at a rate of 0.28°C/min. Next, the temperature is held at 1350°C for eight hours and then ramped to 1395°C at a rate of 0.375°C/min. Finally, the temperature is held at 1395°C for six hours before the cycle is ended and then cooled to room temperature. The ceramic plates are removed from the furnace and , in some embodiments, are then machined with a  
15 diamond saw blade into the final required plate dimension.

The ceramic plate manufactured by the above-described process contains  $\alpha$ - $\text{Si}_3\text{N}_4$  bonded silicon carbide with continuous silicon carbide fiber reinforcement. The density range is between 2.65 and 2.70 g/cc.

In alternative embodiments, particulate materials can be substituted to  
20 change the characteristic hardness and density of the ceramic plate. In one example, the composition of the slip is the same as that described in the table, above, except that 50- $\mu\text{m}$  boron carbide particles are used in place of the 80-120  $\mu\text{m}$  SiC particles. This substitution can be performed without substantially affecting the ballistic performance of the final nitride-bonded composite plate, while nevertheless  
25 lowering the density of the plate to 2.35 g/cm<sup>3</sup>.

Where extreme hardness in the plate is desired, particles of cubic boron nitride, preferably of about 30 - 65  $\mu\text{m}$  particle size, are substituted for a portion of the silicon carbide or boron carbide particles. Preferably, the cubic boron nitride forms about 20% of the slip, and this slip is added to the mold at a stage where the  
30 layer will be positioned where the hardest region is desired, typically at the surface. The resulting hardness of this region can be 40% to 50% harder than the remainder

of the plate. Potential uses for such a hardened plate include Type IV body armor systems and vehicle armor systems that require greater ballistic performance.

While porosity is generally thought to reduce the fracture toughness of a material, the relatively-high-porosity composite elements of this invention are thought to perform favorably relative to the performance of denser, hot-pressed materials. The pores in the composite element of this invention are believed to serve as crack initiators that retard the dissipation of energy when the material is exposed to high impact, while fibers of the composite blunt cracks and absorb energy while holding the element together. Moreover, the carbon-rich surface coating of the fibers is believed to facilitate the crack-arresting feature of this invention. Consequently, composite elements of this invention have the capability to withstand multiple impacts from high-velocity projectiles without shattering.

#### EXPERIMENTAL

The present invention will now be illustrated by the following examples which are not intended to limit the scope of the invention.

##### Example 1

A composite element of this invention were formed in accordance with the above-described procedure. Specifically, the slip comprised silicon carbide powder (74%), silicon powder (11%), red iron oxide (1.5%), sodium silicate (<1%) and distilled water (14%). The fiber reinforcement formed 10 volume % of the matrix/fiber composite and were in the form of a pair of continuous fiber plies orthogonally oriented relative to one another. The composite element had a density of 2.7 g/cm<sup>3</sup> and a porosity of about 15%. The ultimate stress was measured at 137.5 MPa, and the flexural modulus was measured at 107.9 GPa in a four-point bend test conducted in accordance with American Society For Testing and Materials (ASTM) standard C1161-94. When a dynamic mechanical resonance (DMR) test, conducted in accordance with ASTM standard C134-97, was used, a higher reading (138 GPa) for the flexural modulus was obtained.

### Example 2

In this example, nitride-bonded silicon carbide composites of this invention were formed as in the previous example, except that the fiber orientation was limited to a single direction. When used in this example, the four-point flexure test showed  
5 a strength of 172 MPa and a modulus of 127 GPa in the direction of the fibers. Again, when the dynamic mechanical resonance (DMR) test was used, a higher reading (154 GPa) for the flexural modulus was obtained.

### Example 3

For comparison, a non-reinforced nitride-bonded silicon carbide matrix was  
10 formed in accordance with the previous examples, with the exception that fibers were not employed. The matrix was found to have an ultimate stress of 58 MPa with a modulus of 117 GPa when measured via the four-point flexure test. Once again, measurements obtained via the dynamic mechanical resonance (DMR) test provided a higher reading (124 GPa) for the flexural modulus.

### 15 EQUIVALENTS

While this invention has been particularly shown and described with references to preferred embodiments thereof, it will be understood by those skilled in the art that various changes in form and details may be made therein without departing from the spirit and scope of the invention as defined by the appended  
20 claims.

## CLAIMS

What is claimed is:

1. An armored vehicle having an armor shell including at least one composite element, the composite element comprising:
  - 5 a) a reaction-bonded ceramic matrix; and
  - b) ceramic fiber embedded in the ceramic matrix.
2. The armored vehicle of claim 1, wherein the reaction-bonded ceramic matrix includes at least one member selected from the group consisting of nitride-bonded silicon carbide and nitride-bonded boron carbide.
- 10 3. The armored vehicle of claim 1, wherein the reaction-bonded ceramic matrix includes nitride-bonded silicon carbide.
4. The armored vehicle of claim 3, wherein the ceramic fiber includes silicon carbide.
5. The armored vehicle of claim 4, wherein the ceramic fiber is in the form of  
15 non-woven monofilaments.
6. The armored vehicle of claim 5, wherein the reaction-bonded ceramic matrix is porous.
7. The armored vehicle of claim 6, wherein the porosity of the composite element is in a range between about 10% and about 20%.
- 20 8. The armored vehicle of claim 5, wherein the amount of non-woven, monofilament ceramic fiber in the composite element is in a range between about 6% and about 10% by volume.

9. The armored vehicle of claim 5, wherein the non-woven, monofilament silicon carbide fiber has an average diameter in a range between about 79  $\mu\text{m}$  and about 140  $\mu\text{m}$ .
10. The armored vehicle of claim 9, wherein the non-woven, monofilament silicon carbide fiber has an average diameter of about 140  $\mu\text{m}$ .
11. The armored vehicle of claim 5, wherein the non-woven, monofilament silicon carbide fiber is collimated in plies within the matrix.
12. The armored vehicle of claim 5, further comprising cubic boron nitride in the reaction-bonded ceramic matrix.
- 10 13. The armored vehicle of claim 12, wherein the cubic boron nitride is selectively concentrated within a region of the reaction-bonded ceramic matrix.
14. An armored garment including at least one composite element, the composite element comprising:
  - 15 a) a reaction-bonded ceramic matrix; and
  - b) ceramic fiber embedded in the ceramic matrix,the composite element being adapted to protect a wearer of the armored garment from ballistic penetration.
- 15 15. The armored garment of claim 14, wherein the reaction-bonded ceramic matrix includes at least one member selected from the group consisting of nitride-bonded silicon carbide and nitride-bonded boron carbide.
16. The armored garment of claim 14, wherein the reaction-bonded ceramic matrix includes nitride-bonded silicon carbide.

17. The armored garment of claim 16, wherein the ceramic fiber includes silicon carbide.
18. The armored garment of claim 17, wherein the ceramic fiber is in the form of non-woven monofilaments.
- 5 19. The armored garment of claim 18, wherein the nitride-bonded silicon carbide matrix is porous.
20. The armored garment of claim 19, wherein the porosity of the composite element is in a range between about 10% and about 20%.
- 10 21. The armored garment of claim 19, wherein the amount of non-woven, monofilament ceramic fiber in the composite element is in a range between about 4% and about 6%, by volume.
22. The armored garment of claim 19, wherein the non-woven, monofilament ceramic fiber is collimated in plies within the matrix.
- 15 23. The armored garment of claim 15, wherein the reaction-bonded ceramic matrix further includes cubic boron nitride.
24. The armored garment of claim 23, wherein the cubic boron nitride is selectively concentrated within a region of the reaction-bonded ceramic matrix.
- 20 25. The armored garment of claim 14, further including woven ballistic fibers that reinforce the composite element.
26. A method for forming a composite element and incorporating it in an armored vehicle, comprising the steps of:

- a) forming plies of non-woven, monofilament silicon carbide fiber;
  - b) casting a slip including silicon carbide powder and silicon powder around the plies of non-woven, monofilament silicon carbide fiber to form a powder / fiber composition;
  - 5 c) reaction-bonding the powder / fiber composition to form a reaction-bonded composite element; and
  - d) attaching the reaction-bonded composite element to a vehicle substructure, wherein the reaction-bonded composite element forms a shield around the vehicle substructure.
- 10 27. The method of claim 26, wherein the slip further includes boron carbide powder.
28. A method for forming an armored garment, comprising the steps of:
- a) forming plies of non-woven, monofilament silicon carbide fiber;
  - b) casting a slip including silicon carbide powder and silicon powder around the plies of non-woven, monofilament silicon carbide fiber to form a powder / fiber composition;
  - 15 c) reaction-bonding the powder / fiber composition to form a reaction-bonded composite element; and
  - d) attaching the reaction-bonded composite element to a garment that
  - 20 can be worn by an individual to shield the individual from projectiles.
29. The method of claim 28, wherein the slip further includes boron carbide powder.

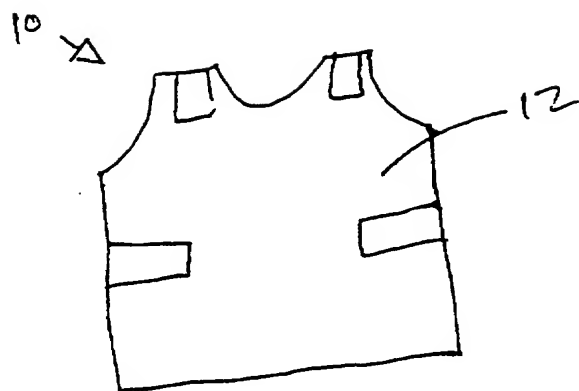


FIG. 1

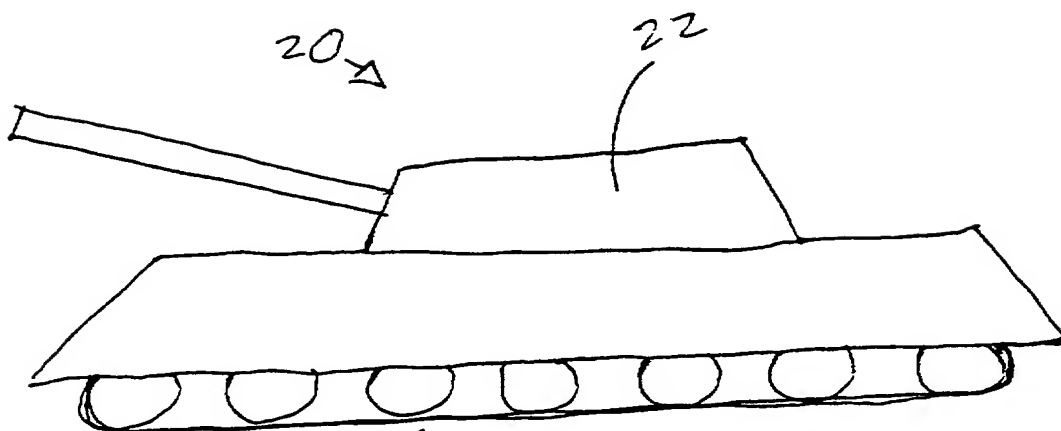


FIG. 2



(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
19 October 2000 (19.10.2000)

PCT

(10) International Publication Number  
**WO 00/62007 A3**

- (51) International Patent Classification<sup>7</sup>: F41H 5/04
- (21) International Application Number: PCT/US00/08990
- (22) International Filing Date: 31 March 2000 (31.03.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
60/127,245 31 March 1999 (31.03.1999) US
- (71) Applicant (for all designated States except US): TEX-  
TRON SYSTEMS CORPORATION [US/US]; 201 Low-  
ell Street, Wilmington, MA 01887 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): COMPERE, Paul  
[US/US]; 315 Medford Street, Malden, MA 02148 (US).  
DARDEN, William, S. [US/US]; 190 Ballville Road,  
Bolton, MA 01740 (US). TREASURE, Monte, A.  
[US/US]; 3 Overlook Drive, Pelham, NH 03076 (US).  
SINGLER, Robert, E. [US/US]; 53 Selwyn Road, Bel-  
mont, MA 02478 (US). DIBONA, Gary, S. [US/US]; 13  
Douglas Drive, Amherst, NH 03031 (US).
- (74) Agents: PIERCE, N., Scott et al.; Hamilton, Brook,  
Smith & Reynolds, P.C., Two Militia Drive, Lexington,  
MA 02421 (US).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE,  
DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU,  
ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS,  
LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ,  
PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT,  
TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent  
(AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent  
(AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU,  
MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— With international search report.
- (88) Date of publication of the international search report:  
8 February 2001
- For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: COMPOSITE ARMOR AND FABRICATION METHOD

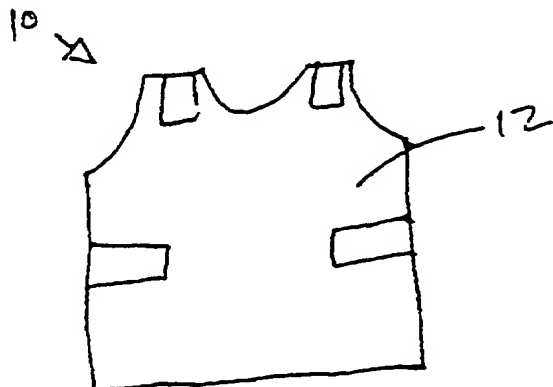

(57) Abstract: A composite element in an armored vehicle or armored garment includes a reaction-bonded ceramic matrix with ceramic fiber embedded therein. Preferably, the reaction-bonded ceramic matrix includes nitride-bonded silicon carbide, and the ceramic fiber includes silicon carbide. The matrix can additionally include nitride-bonded boron carbide. In a method of this invention, plies of non-woven, monofilament silicon carbide fiber are formed, and a slip including silicon carbide powder and silicon powder is cast around the plies to form a matrix around the plies. The silicon/silicon carbide matrix is then reaction-bonded to form a composite element of this invention.

WO 00/62007 A3

## INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 00/08990

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 F41H5/04

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 F41H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

### C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X  A	FR 2 723 193 A (FRANCE ETAT ;ST GOBAIN RECHERCHE (FR)) 2 February 1996 (1996-02-02) page 3, line 21-27 page 3, line 34 -page 4, line 19 page 4, line 32 -page 5, line 36 page 8, line 7-19; figure 1  ---  -/--	1          2-6, 11, 14-19, 22, 25-29

☒ Further documents are listed in the continuation of box C.

**Y** Patent family members are listed in annex.

° Special categories of cited documents :

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

**\*X** document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

'&' document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

16 November 2000

24/11/2000

Name and mailing address of the ISA  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Van der Plas, J

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/08990

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 421 087 A (NEWKIRK MARC S ET AL) 6 June 1995 (1995-06-06) column 5, line 19-27 column 5, line 38-46 column 6, line 46-60 column 8, line 49 -column 9, line 16 column 12, line 41-53 column 15, line 1-40 column 17, line 23-49 column 24, line 12-31	1-11, 14-22,25
P,X	WO 99 22195 A (LANXIDE TECHNOLOGY CO LTD) 6 May 1999 (1999-05-06) page 7, line 5-21	1-11, 14-22,25
A	EP 0 798 281 A (TOKYO SHIBAURA ELECTRIC CO) 1 October 1997 (1997-10-01) page 2, line 21-31 page 2, line 1-16 page 5, line 39-44 page 6, line 11-29; claims 8-14	26-29
A	US 5 236 786 A (NEWKIRK MARC S ET AL) 17 August 1993 (1993-08-17) column 4, line 34-53 column 6, line 16-29 column 7, line 60 -column 8, line 23 column 10, line 6-29 column 10, line 47-64 column 12, line 41-65	26-29
A	WO 94 27110 A (KENNAMETAL HERTEL AG ;SCHIEFER JOSEF (DE); TIEFHOLZ HEINZ (DE)) 24 November 1994 (1994-11-24) claim 1	6,7,19, 20

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/08990

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
FR 2723193	A	02-02-1996	NONE		
US 5421087	A	06-06-1995	AU 6390790 A		02-05-1991
			BR 9005439 A		17-09-1991
			CA 2028749 A		01-05-1991
			CN 1051395 A		15-05-1991
			CS 9005229 A		18-03-1992
			EP 0426608 A		08-05-1991
			HU 56620 A		30-09-1991
			JP 3223438 A		02-10-1991
			NO 904637 A		02-05-1991
			NZ 235784 A		26-08-1992
			PT 95732 A		31-03-1993
			SU 1836478 A		23-08-1993
			ZA 9008633 A		24-06-1992
WO 9922195	A	06-05-1999	AU 1273899 A		17-05-1999
EP 0798281	A	01-10-1997	JP 9268079 A		14-10-1997
			JP 9268063 A		14-10-1997
			JP 9268065 A		14-10-1997
			DE 69702677 D		07-09-2000
			US 5955391 A		21-09-1999
US 5236786	A	17-08-1993	US 4923832 A		08-05-1990
			US 5356720 A		18-10-1994
			US 5436209 A		25-07-1995
			US 5340655 A		23-08-1994
			AT 74339 T		15-04-1992
			AU 591280 B		30-11-1989
			AU 7261787 A		12-11-1987
			BG 50155 A		15-05-1992
			BR 8702282 A		17-02-1988
			CA 1313942 A		02-03-1993
			CA 1328666 A		19-04-1994
			CN 87103352 A, B		30-03-1988
			CS 8703236 A		19-02-1992
			DE 3777871 A		07-05-1992
			DE 245193 T		19-05-1988
			DK 233287 A		09-11-1987
			EP 0245193 A		11-11-1987
			ES 2000419 T		01-03-1993
			FI 872020 A, B,		09-11-1987
			GR 3005073 T		24-05-1993
			HU 46615 A, B		28-11-1988
			IE 60942 B		07-09-1994
			IL 82463 A		30-06-1991
			IN 167358 A		13-10-1990
			JP 2518847 B		31-07-1996
			JP 63030377 A		09-02-1988
			KR 9504064 B		25-04-1995
			MX 166922 B		15-02-1993
			NO 175676 B		08-08-1994
			NZ 220182 A		26-06-1990
			PH 26793 A		13-10-1992
			PT 84843 A, B		01-06-1987
			RU 2039023 C		09-07-1995
			TR 23773 A		12-09-1990

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. onal Application No

PCT/US 00/08990

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5236786 A		YU 81387 A	31-08-1988
		ZA 8702585 A	30-09-1987
WO 9427110 A	24-11-1994	AT 150540 T	15-04-1997
		DE 59402156 D	24-04-1997
		EP 0697093 A	21-02-1996